


MMP SERIES / 45mm - 95mm

EN 779 EFFICIENCY: M5-F8
 MEDIA : Micro Glass Fibre
 SEPARATORS: Hotmelt
 FRAME: Cardboard
 PROTECTION GRID: Expanded Galvanized Steel
 GASKET: Two component, continuous polyurethane
 FINAL PRESSURE DROP: 450 Pascals
 OPERATING TEMPERATURE: 80 °C

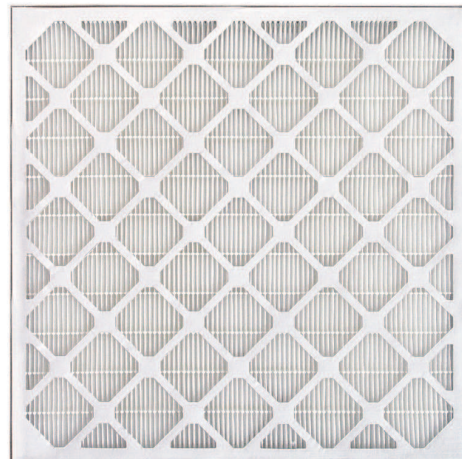

DISPOSABLE MINI PLEATED FILTERS

Part Number	Filter Class (EN 779)	Width (mm)	Height (mm)	Depth (mm)	Media Area (m ²)	Air Flow (m ³ /h)	Pressure drop (Pascals)
M5 ▶							
MMP-595/595/45-M5	M5	595	595	45	5,9	2000	90
MMP-495/595/45-M5	M5	495	595	45	4,9	1650	90
MMP-287/595/45-M5	M5	287	595	45	2,9	1000	90
MMP-595/595/95-M5	M5	595	595	95	11,5	2900	100
MMP-495/595/95-M5	M5	495	595	95	9,6	2400	100
MMP-287/595/95-M5	M5	287	595	95	5,8	1450	100
M6 ▶							
MMP-595/595/45-M6	M6	595	595	45	5,9	2000	100
MMP-495/595/45-M6	M6	495	595	45	4,9	1650	100
MMP-287/595/45-M6	M6	287	595	45	2,9	1000	100
MMP-595/595/95-M6	M6	595	595	95	11,5	2900	110
MMP-495/595/95-M6	M6	495	595	95	9,6	2400	110
MMP-287/595/95-M6	M6	287	595	95	5,8	1450	110
F7 ▶							
MMP-595/595/45-F7	F7	595	595	45	5,9	2000	120
MMP-495/595/45-F7	F7	495	595	45	4,9	1650	120
MMP-287/595/45-F7	F7	287	595	45	2,9	1000	120
MMP-595/595/95-F7	F7	595	595	95	11,5	2900	130
MMP-495/595/95-F7	F7	495	595	95	9,6	2400	130
MMP-287/595/95-F7	F7	287	595	95	5,8	1450	130
F8 ▶							
MMP-595/595/45-F8	F8	595	595	45	5,9	2000	150
MMP-495/595/45-F8	F8	495	595	45	4,9	1650	150
MMP-287/595/45-F8	F8	287	595	45	2,9	1000	150
MMP-595/595/95-F8	F8	595	595	95	11,5	2900	160
MMP-495/595/95-F8	F8	495	595	95	9,6	2400	160
MMP-287/595/95-F8	F8	287	595	95	5,8	1450	160