


MV-HT PLASTIC SERIES / 292mm

EN 779 EFFICIENCY: M6-F9
 MEDIA : Micro Glass Fibre
 SEPARATORS: High Temperature Resistant Hotmelt
 GASKET: Two component, continuous polyurethane
 FRAME: Polycarbonate
 FINAL PRESSURE DROP: 600 Pascals
 OPERATING TEMPERATURE: 120 °C

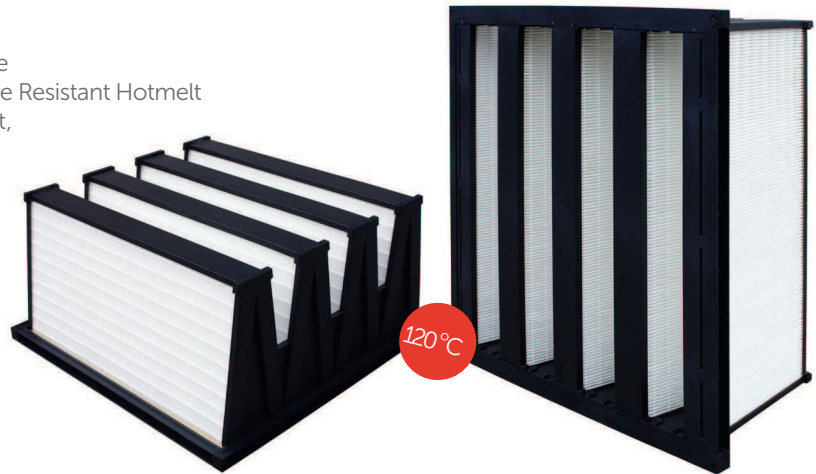

MICROFIL V HIGH TEMPERATURE FILTERS

Part Number	Filter Class (EN 779)	Width (mm)	Height (mm)	Depth (mm)	Media Area (m ²)	Air Flow (m ³ /h)	Pressure drop (Pascals)	Energy Rating
M6 ▶								
MV-M6-01M	M6	592	292	292	8,5	2125	100	C
MV-M6-02M	M6	592	492	292	15	3500	100	C
MV-M6-03M	M6	592	592	292	18	4250	100	C
F7 ▶								
MV-F7-01M	F7	592	292	292	8,5	2125	115	B
MV-F7-02M	F7	592	492	292	15	3500	115	B
MV-F7-03M	F7	592	592	292	18	4250	115	B
F8 ▶								
MV-F8-01M	F8	592	292	292	8,5	2125	125	B
MV-F8-02M	F8	592	492	292	15	3500	125	B
MV-F8-03M	F8	592	592	292	18	4250	125	B
F9 ▶								
MV-F9-01M	F9	592	292	292	8,5	2125	155	A
MV-F9-02M	F9	592	492	292	15	3500	155	A
MV-F9-03M	F9	592	592	292	18	4250	155	A